


Maße und Leistungen verschiedener Gaszähler

Balgengaszähler

	Q _{max} m ³ /h	KW	DN mm	A Stutzen- abstand	B Einbau- höhe	C Einbau- tiefe	D Gehäuse- breite	E Gesamt- tiefe
G4	6	50	1"	250	277	75	330	177
G6	10	98	5/4"	250	300	85	330	200
G10	16	156	1½"	280	369	123	396	269
G16	25	245	1½"	280	369	123	396	269
G25	40	392	2"	335	443	138	457	299
G40	65	637	65	430	657	185	612	392
G65	100	980	80	640	865	197	840	410
G100	160	1568	100	675	1000	265	910	546

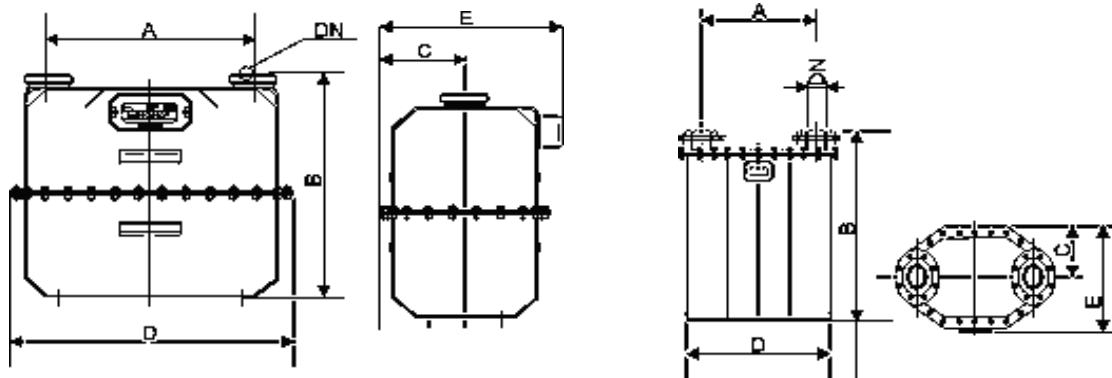

Drehkolbenzähler

	Q _{max} m ³ /h	KW	DN mm	BT Gesamt- tiefe	BL Bau- länge	H Bau- höhe	C Bautiefe (vorne)	E Bautiefe (hinten)
G40	65	437	50	334	171	172	193	141
G65	100	980	50	406	171	172	229	177
G100	160	1568	80	460	171	172	256	204
G160	250	2450	100	489	241	241	269	217
G250	400	3920	100	626	241	241	339	287
G400	650	6370	150	466	260	308	204	262
G650	1000	9800	150	598	260	308	336	262

